



Unique Quality · Unique Value · Unipoint

Rotating Machine
NEW PRODUCT HIGHLIGHTS
2015 MAR. / NEWS.138





Unique Quality · Unique Value · Unipoint

Dear Valued Customers,

Please find attached Unipoint "New Product Highlights" for Mar. 2015, featuring our newest additions for Rotating Machine Line.

We would like to introduce to you our new units as STR-7069, STR-7916

■ **Replacement for Delco Types**

STR-7069: 12V, 2.5KW. USED ON PERKINS VARIOUS MODELS W/DIESEL ENG.

■ **Replacement for Mitsubishi Types**

STR-7916: 24V, 5.5KW. USED ON RENAULT V.I. & VOLVO FM9/LM9 MEDIUM HEAVY DUTY TRUCKS
W/VARIOUS MODELS & ENG.

You can find the detailed spec, cross reference numbers & applications from our Unipoint News #138.

Also, all the data have been updated to our website catalog : www.unipoint.com.tw

All these products are now ready for production and can be included in your new order.

Thank you for your business and support!

Best Regards,

Unipoint Customer Service

STARTER

STR-7069



STR-7069	
Starter Type:	
Starter Model:	STR-7069
Rated Power:	2.50 KW
Rated Voltage:	12.00 V
Free Run Speed:	5698 RPM
Free Run Current:	133 Amp
Max Of Power:	2.58 KW
Max Of Torque:	23.72 Nm
Max Of Current:	683 Amp
Supply:	16 Amp
Direction:	CCW
Hold Current:	16 Amp
Pull Current:	66 Amp
Voltage Drop:	0.4572 V

PASS

Performance Curve

Power	2.5KW
Rotation	CCW
Teeth	10T
Voltage	12V

CROSS REFERENCE


DELCO No.'S
 1998332
 1998375
 INTERNATIONAL No.'S
 636788R91

TO FIT

PERKINS VARIOUS MODELS DIESEL ENGS.

STARTER

STR-7916

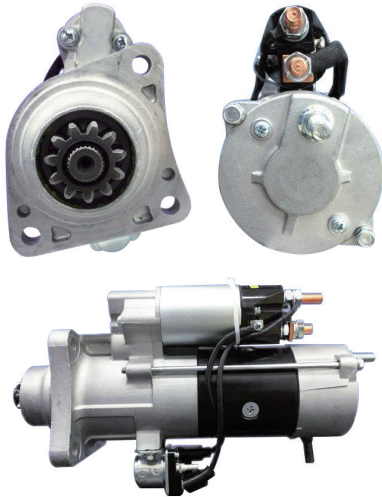

STR-7916	
Starter Type:	
Starter Model:	STR-7916
Rated Power:	5.50 KW
Rated Voltage:	24.00 V
Free Run Speed:	4398 RPM
Free Run Current:	77 Amp
Max Of Power:	6.39 KW
Max Of Torque:	55.43 Nm
Max Of Current:	690 Amp
Stipple:	22 Amp
Direction:	CW
Hold Current:	17 Amp
Pull Current:	161 Amp
Voltage Drop:	0.1925 V

PASS

Performance Curve

Power	5.5KW
Rotation	CW
Teeth	11T
Voltage	24V

CROSS REFERENCE

MITSUBISHI No.'S
M009T61473
M009T61474
M9T61473
M9T61474
VOLVO No.'S
20563533
20732977
21025968

TO FIT

RENAULT	V.I.
VOLVO	FM9
VOLVO	LM9

ARMATURE

PART NO. AM-7900



Cum. OD	38.7mm
No. of Splines	13T
Note	WITH BEARING
OD	60.2mm
Overall Length	176.7mm
Voltage	24V

SOLENOID

PART NO. SNLS-7539



No. of Terminal	3 Terminal
Voltage	24V